

# CP01K 65" / 86" DuoBoard Corporate Interactive Flat Panel

## Features



- Duo technology: Duo Boards / Duo Users / Duo Windows / Duo OS
- Collaboration+: PCAP touch technology (direct bonding) / Built-in cloud annotation tool EZWrite 5.0\* / InstaShare\*\* supports casting from up to 9 devices to the display wirelessly
- One-touch video conferencing: embedded FHD camera, array microphones, speakers / Pre-installed with TeamViewer Meeting & Fully compatible with other software such as Zoom Rooms & Microsoft Teams when using OPS
- Smart Eye-Care solution (Anti-glare / Flicker-free / Low Blue Light) & Germ-resistant screen
- Hassle-free management through DMS & OTA (over-the-air) update
- Landscape and portrait display orientation (available on 65")



\*EZWrite 6.0 will be available in 2021 Q4 \*\*InstaShare 2 is available for free in BenQ Suggest

## Specifications

Model		CP6501K	CP8601K	
Panel	Screen Size	65"	86"	
	Resolution	3840 x 2160	3840 x 2160	
	Brightness (Typ.)	320 nits	350 nits	
	Contrast Ratio (Typ.)	5000:1	1200:1	
	Viewing Angle (H/V)	178 degree (H) / 178 degree (V)	178 degree (H) / 178 degree (V)	
	Response Time (G-t-G)	8 ms	8 ms	
	Backlight Life (hrs)	50,000 hrs	50,000 hrs	
	Operating Hour	18 hrs / 7 days	18 hrs / 7 days	
Power	Orientation	Landscape / Portrait	Landscape	
	Type	Internal	Internal	
	Power Supply	100V~240V, 50-60Hz	100V~240V, 50-60Hz	
	Power Consumption	Maximum (W/h)	300W	500W
		Typical (W/h)	129W	187W
		Standby Mode (W/h)	<0.5W	<0.5W
		Off Mode (W/h)	0W	0W
AC Power Switch	Yes	Yes		
Wake Up	VGA / HDMI / LAN	VGA / HDMI / LAN		
Touch	Technology, Number of Touches	PCAP direct bonding, up to 20 point multi-touch	PCAP direct bonding, up to 20 point multi-touch	
	Interface	USB Type B x2	USB Type B x2	
Glass	Tempered Glass, Hardness	3mm, 7H	3mm, 7H	
	AG Coating	AG75	AG75	
Caring	Eye-Care Solution	Smart Eye-Care	Smart Eye-Care	
	Air-quality Sensor	Yes	Yes	
	Germ-resistant Screen	Yes	Yes	
Environment	Operation Temperature	0°C ~ 40°C	0°C ~ 40°C	
	Operating Humidity	10% ~ 90% RH non-condensing	10% ~ 90% RH non-condensing	
Connectivity	Input	VGA	x1	x1
		HDMI	2.0 x3	2.0 x3
	Output	HDMI	2.0 x1	2.0 x1
		USB	Type A	2.0 x4, 3.0 x3
		Type B	x2	x2
	RS232	Yes	Yes	
	RJ45	Yes	Yes	
Remote Controller	Yes	Yes		
Audio	Internal Speaker	Built-in speakers 10W x2 & subwoofer 16W x1 (HIFI 2.1)	Built-in speakers 10W x2 & subwoofer 16W x1 (HIFI 2.1)	
Mechanical	Dimension (mm)	Screen	1503 x 909 x 85	1962 x 1167 x 85
		Package	1697 x 1039 x 220	2146 x 1326 x 280
	Weight (kg)	Screen	43,2	71,5
		Package	58,5	97,9
	Bezel Width (T/B/L/R) (mm)		37 / 37 / 37 / 37	32,5 / 32,5 / 32,2 / 36,1
	Wall Mounting (VESA) (mm) (Screw Type /Max. Length)		600 x 400, M8 x 25 mm	800 x 600, M8 x 25 mm
	OPS	Yes	Yes	
	NFC Sensor	Yes	Yes	
Pen Tray	No	No		


Specifications subject to change without notice. Please contact your local BenQ office for the full BenQ product range.

# Input and Output Terminals

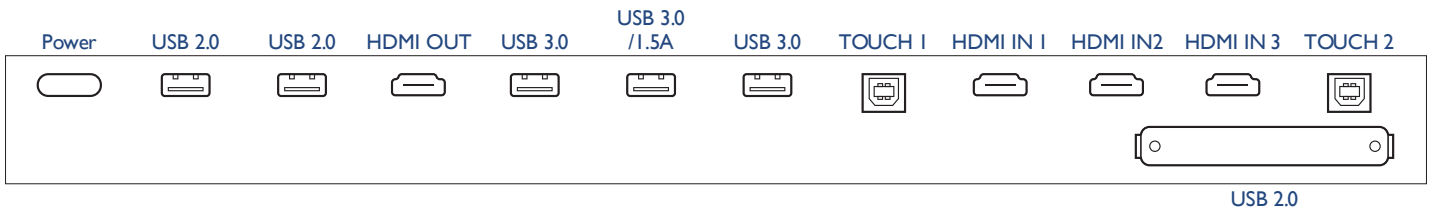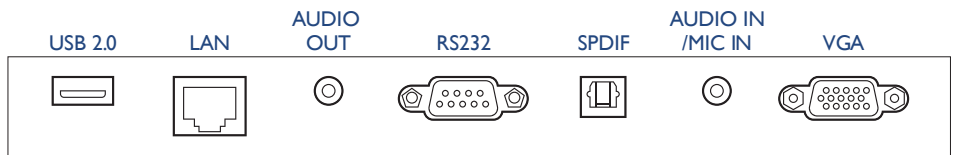


# Dimensions

## CP6501K

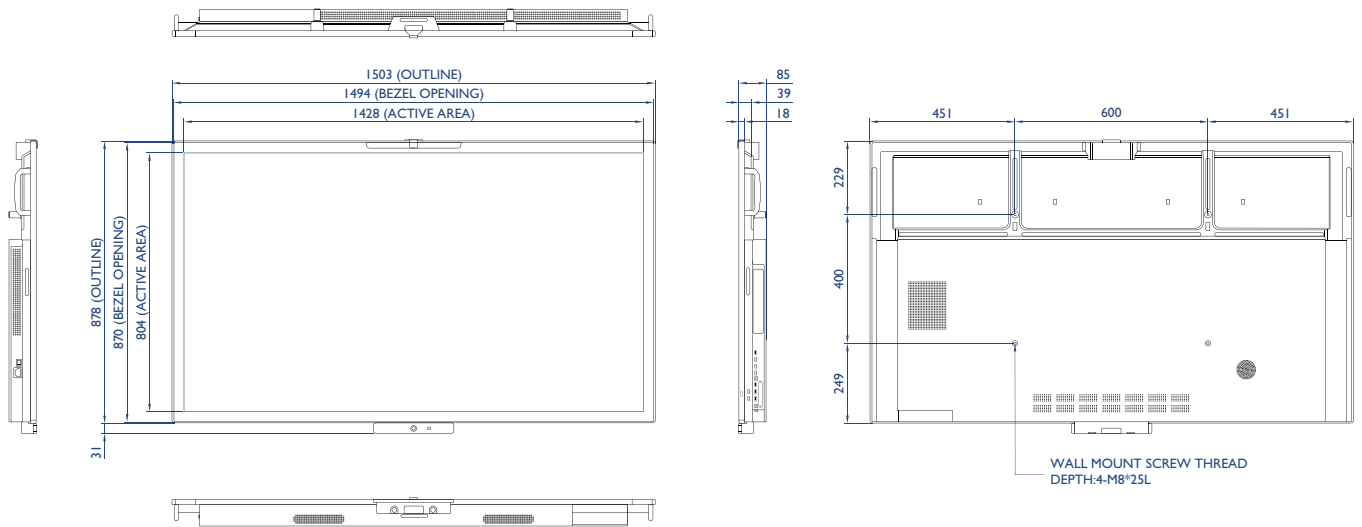

## CP8601K

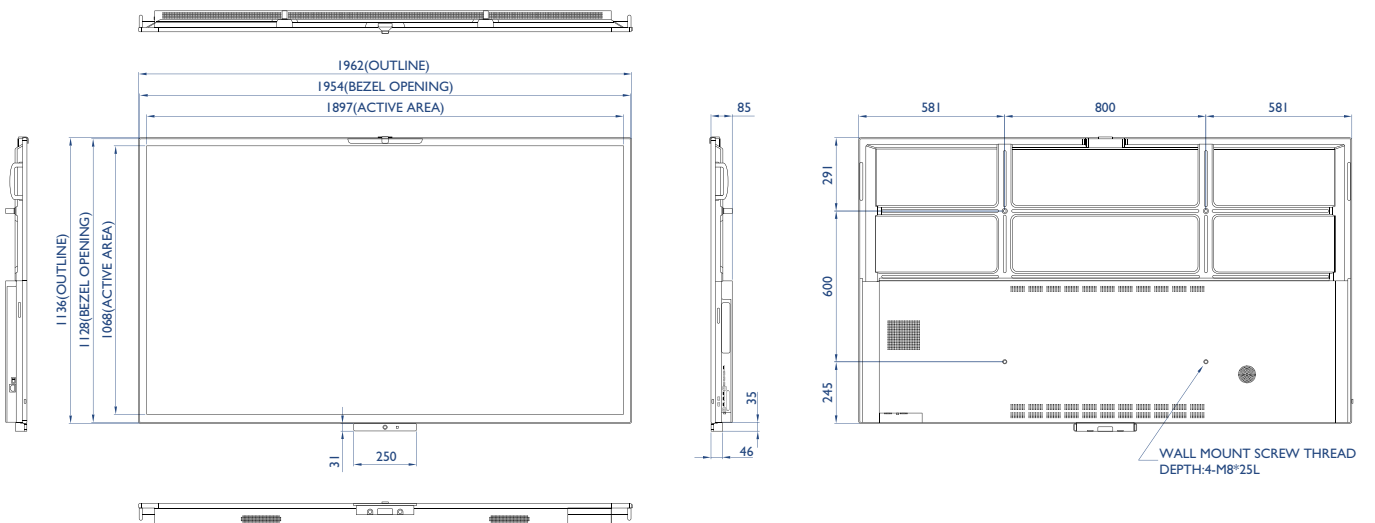

SCAN ME



<https://www.benq.eu/en-eu/business/index.html>

© 2021 BenQ Corp. Specifications may vary by region, please visit your local stores for details. Actual product's features and specifications are subject to change without notice. This material may include corporate names and trademarks of third parties which are the properties of the third parties respectively.

**BENQ**