



Pantone® Validated Pro Signage

The future is brighter than ever

Overcome the challenges of managing and deploying signage with the SH04 series. Experience Pantone colors, Google integration, easy content management, and high brightness for impactful communication.

BenQ Education
Shape the Future of Learning

Pantone® Validated Pro Signage

SH5504/SH6504/SH7504



Pantone colors



Signage enhanced



High brightness

Simply the best

The SH04 is the world's first high-brightness, wide-color-gamut signage to be Pantone Validated, Pantone® SkinTone™ Validated, and Google certified. It delivers diverse color modes, customizable signage content, Google apps and services, and stunning brightness—truly one of a kind.



Pantone colors

The SH04 is Pantone Validated and Pantone SkinTone Validated to offer industrystandard colors for a range of applications.



Engaging signage

Create, display, and manage signage content and alerts for all your SH04 displays with BenQ X-Sign.



High brightness

With a 800 nits of brightness, the SH04 can display all of your content in stunning brilliance.

Color modes for enhanced classes

With a 95% DCI-P3 (CIE 1976) color gamut and 10-bit color depth, the SH04 can provide stunning color modes for a variety of applications.



The industry standard in color

Pantone mode is validated to offer Pantone colors, including the Pantone SkinTone Guide palette, so students studying subjects from art and design to fashion and photography can train with industry-standard colors.



Enhanced inclusivity in class

Pantone SkinTone Guide colors help students to accurately learn with every skin tone imaginable in medical, art, design, and cosmetology applications, and more.


Color modes for enhanced classes



Experience MacBook perfection

See the vivid colors on your MacBook[®] faithfully reproduced on the vibrant display of the SH04 with M-book mode.


*MacBook® is a trademark of Apple Inc.

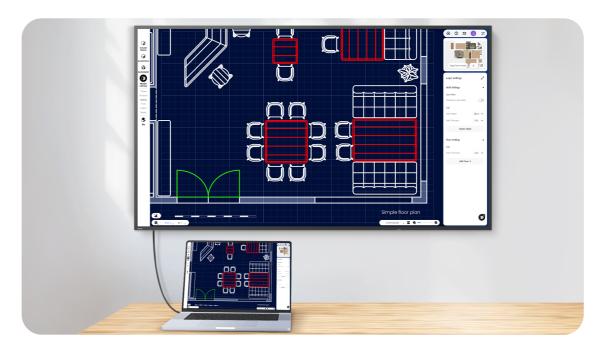

Detail where it counts most

High-detail mode on the SH04 provides greater contrast and clarity for schematics, blueprints, and floor plans for classes ranging from architecture and engineering to urban planning and interior design.

Color modes for enhanced classes

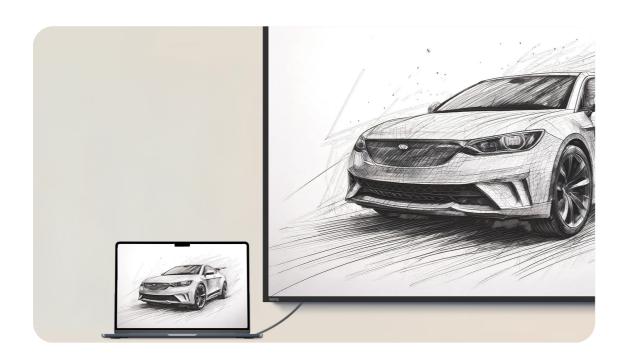

A paper-like viewing experience

Sketch mode simulates real paper by converting images to grayscale, introducing subtle warmth, and lowering display brightness. This improves visual comfort, conserves energy, and is ideal for courses in art, industrial design, fashion, and more.



A cinema in every space

Cinema mode lets you play video projects, films, and signage videos with vivid colors and depth. Connect an HDMI cable for HDR10 delivery and enjoy brighter highlights, deeper blacks, and richly detailed shadows for an immersive visual experience.

Digital signage redefined



High brightness where it counts


With 800 nits of brightness, the SH04 ensures optimal visibility of your content in hallways, cafeterias, gymnasiums, and classrooms in any lighting condition.



Comfortable viewing, anytime

Experience enhanced viewing comfort with an improved anti-glare screen, plus low blue light technology, for reduced eye strain.

Digital signage redefined

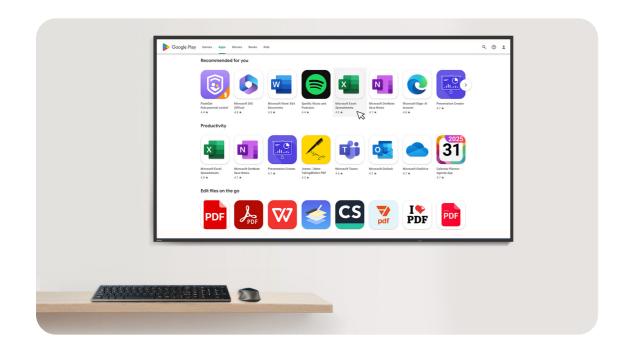

Connect and engage

Make the most of Google Play apps on the SH04 by connecting a keyboard and mouse for a truly engaging experience.



Display your way

The VESA-compatible SH04 can be easily mounted in portrait or landscape mode, making it ideal for various digital signage applications across your campus.

Digital signage redefined



Immersive audio and video

The SH04's powerful twin 12W speakers and stunning 4K display deliver captivating audiovisual experiences, bringing your content to life.



Take control of your signage

Protect your display with the SH04's IR sensor lock, preventing unauthorized access from universal remotes.



Enhanced security at every level


Dedicated Wi-Fi and USB covers add a further layer of protection at the hardware level for all your SH04 signage.

Get the word out everywhere



Effortless remote signage


With X-Sign, you can remotely create, manage, and display content on every SH04 screen—from announcements and menus to team scores and more.

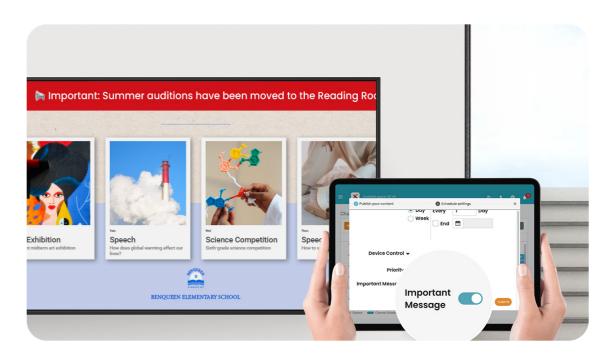

Broadcast to all your displays

Leverage X-Sign's advanced features to push real-time or scheduled announcements with alert sounds to every SH04 display in your school.

Get the word out everywhere

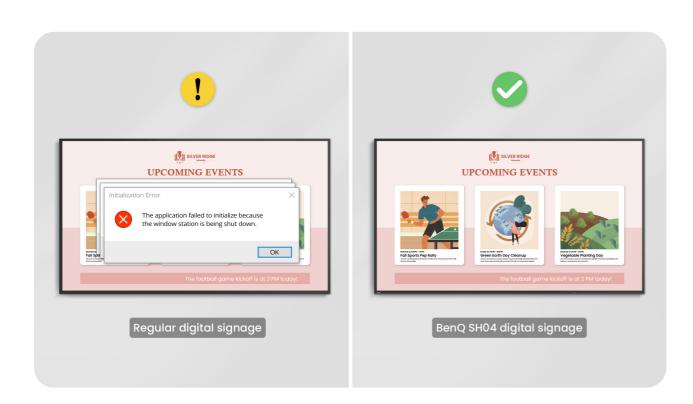

Uninterrupted content, every time


X-Sign keeps your content uninterrupted by message windows or system alerts, providing a seamless signage experience.

Streamlined management

The BenQ ecosystem makes managing devices, apps, and user accounts simpler than ever to reduce the workload of IT and admin staff.




Streamlined management

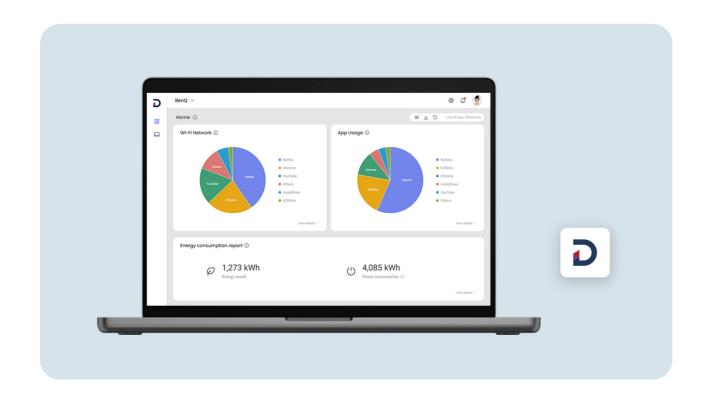

Remotely control every SH04


The BenQ Device Management Solution (DMS) lets IT admins manage SH04 signage remotely, handling device settings, power schedules, firmware updates, app installations, and more.

Streamlined management

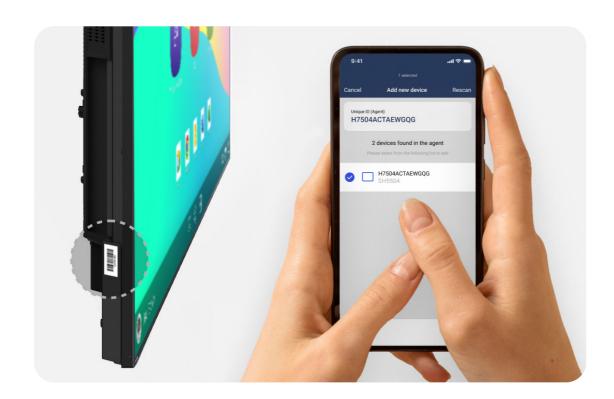

Streamlined provisioning


Easily provision multiple new SH04 displays by scanning the barcode on the box or device to connect them to DMS.

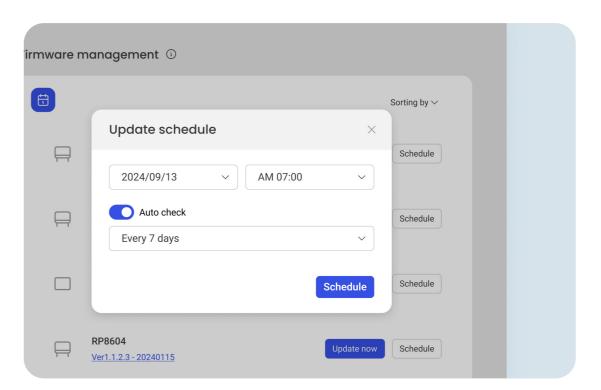

Easy firmware updates

Schedule automatic firmware updates to ensure your SH04 displays always have the latest features and security patches.

Created for classroom excellence

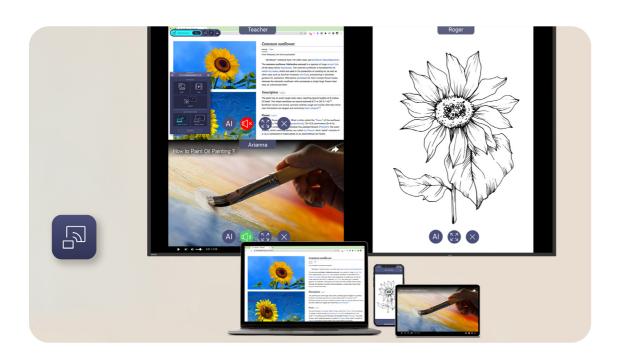

Easily share any content in class


Effortlessly share content across devices with InstaShare 2. Compatible with Windows, Android, macOS, iOS, iPadOS, and ChromeOS, InstaShare 2 allows wireless casting and includes a built-in smart controller for seamless presentation control.



All your files in one place


Securely log into your BenQ account with the scan of a QR code to find your cloud drives, pinned apps, and website bookmarks. Plus, only you can see your data on the SH04.

Created for classroom excellence

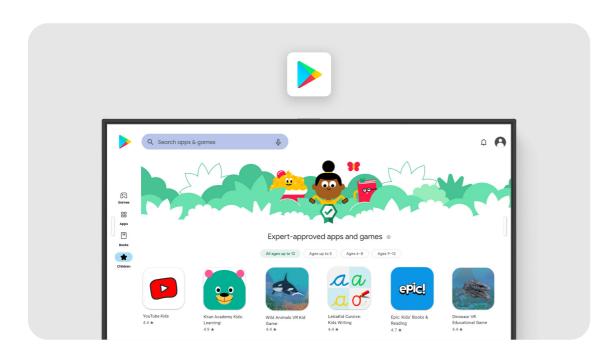

Teach with the apps you love

With the SH04's EDLA certification, you can access the extensive library of apps on the Google Play Store. Use the programs you're familiar with to keep learning engaging without skipping a step.

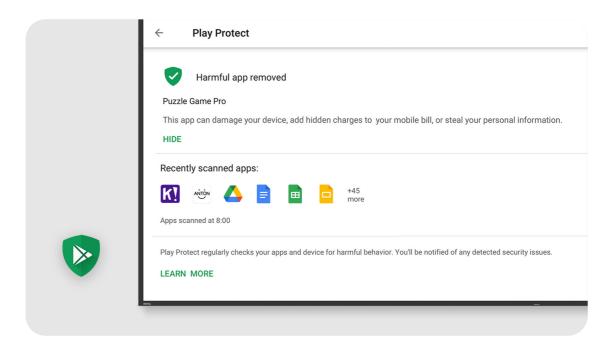

Secure apps with Google Play Protect

Google Play Protect prevents harmful apps from being downloaded to the SH04 and removes any that exhibit malicious behavior.

Built-in sustainability





Certified energy saver

The SH04 series is ENERGY STAR® 8.0 certified, making it easier for you to lower emissions and cut down on energy costs.



Reduced footprint


We've decreased the display's packaging size by half, improving transport efficiency by 60% and cutting emissions.



Remote energy control

Easily set sleep modes, remote power scheduling, and get real-time energy usage insights with DMS.


SH04 Device Specifications

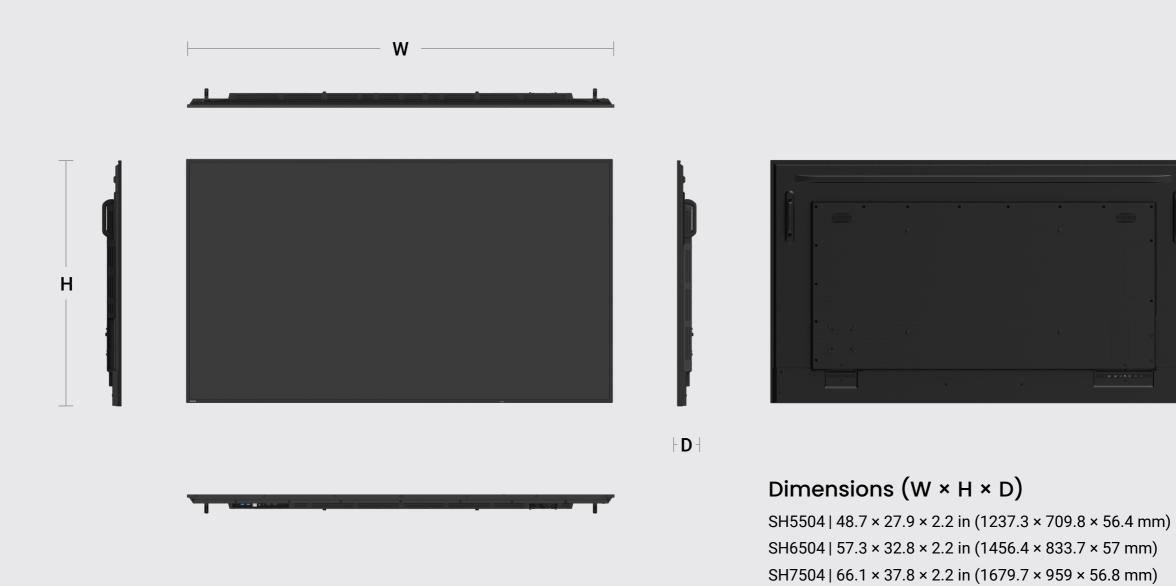

SH04 Device Specifications



VESA Specifications

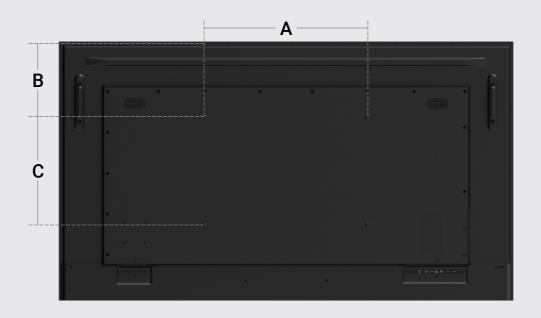

| Dimension | 55" | 65" | 75" |
|-----------|----------|------------|----------|
| А | 15.8 in | 15.8 in | 23.6 in |
| | (400 mm) | (400 mm) | (600 mm) |
| В | 6.4 in | 9.1 in | 11 in |
| | (154 mm) | (230.4 mm) | (279 mm) |
| С | 15.8 in | 15.8 in | 15.8 in |
| | (400 mm) | (400 mm) | (400 mm) |

| Model | SH5504 | SH6504 | SH7504 |
|---|------------------------------------|------------------------------------|------------------------------------|
| Panel | | | |
| Screen size | 55" | 65" | 75" |
| Panel supplier | BOE | BOE | BOE |
| Bright / Dark / Total defective pixels (Refer to panel IIS for details) | 0/12/12 | 0 / 12 / 12 | 3 / 12 / 15 |
| Light source | Direct LED | Direct LED | Direct LED |
| Panel grade | PID | PID | PID |
| Panel type | IPS | IPS | IPS |
| Operation hours | 24 hours / 7 days | 24 hours / 7 days | 24 hours / 7 days |
| Orientation | Landscape and Portrait | Landscape and Portrait | Landscape and Portrait |
| Active area | 47.6 × 26.7 in (1209.6 × 680.4 mm) | 56.2 × 31.6 in (1428.5 × 803.5 mm) | 64.9 × 36.5 in (1649.7 × 927.9 mm) |
| Aspect ratio | 16:9 | 16:9 | 16:9 |
| Contrast ratio (typical) | 1200:1 | 1200:1 | 1200:1 |
| Resolution | 4K UHD (3840 × 2160 pixels) | 4K UHD (3840 × 2160 pixels) | 4K UHD (3840 × 2160 pixels) |
| Response time | 8 ms | 8 ms | 8 ms |
| Pixel pitch | 0.012 × 0.012 in (0.32 × 0.32 mm) | 0.014 × 0.014 in (0.37 × 0.37 mm) | 0.016 × 0.016 in (0.43 × 0.43 mm) |
| Frame rate | 60 Hz | 60 Hz | 60 Hz |
| Viewing angle | 178° | 178° | 178° |
| Panel surface | Anti-glare Haze 25% | Anti-glare Haze 25% | Anti-glare Haze 25% |
| Color gamut (CIE 1976) | 95% DCI-P3, 99% sRGB, 85% NTSC | 95% DCI-P3, 99% sRGB, 85% NTSC | 95% DCI-P3, 99% sRGB, 85% NTSC |
| Color depth | 10-bit | 10-bit | 10-bit |
| Panel brightness (typical) | 800 nits | 800 nits | 800 nits |
| Backlight life (typical) | 50,000 hrs | 50,000 hrs | 50,000 hrs |

| Glass | | | |
|---------------------------|-----------------------------|-----------------------------|-----------------------------|
| Anti-glare | Yes | Yes | Yes |
| System | | | |
| SoC | AML311D2 | AML311D2 | AML311D2 |
| CPU | A73 × 4 + A53 × 4 | A73 × 4 + A53 × 4 | A73 × 4 + A53 × 4 |
| GPU | G52 MP8 | G52 MP8 | G52 MP8 |
| Operating system | Android 13.0 | Android 13.0 | Android 13.0 |
| Memory Storage | 8 GB 64 GB | 8 GB 64 GB | 8 GB 64 GB |
| Connectivity | | | |
| HDMI (in out) | 2 × HDMI 2.0 No | 2 × HDMI 2.0 No | 2 × HDMI 2.0 No |
| Ethernet | 10 / 100 Mbps (Android) × 1 | 10 / 100 Mbps (Android) × 1 | 10 / 100 Mbps (Android) × 1 |
| RS-232 | 1 0 | 1 0 | 1 0 |
| USB Type-A | 2 × 2.0 | 2 × 2.0 | 2 × 2.0 |
| Built-in peripherals | | | |
| Speaker | 2 × 12 W | 2 × 12 W | 2 × 12 W |
| IR sensor | Yes | Yes | Yes |
| Power | | | |
| Power | AC 100-240V 50 / 60Hz | AC 100-240V 50 / 60Hz | AC 100-240V 50 / 60Hz |
| Switch | 1 | 1 | 1 |
| Wake up | HDMI / LAN | HDMI / LAN | HDMI / LAN |
| Maximum power consumption | 270 W | 370 W | 420 W |
| Standby power consumption | <0.5 W | <0.5 W | <0.5 W |
| Typical power consumption | 110.3 W | 131.3 W | 144.9 W |
| ENERGY STAR® | Yes | Yes | Yes |

| Physical | | | |
|---------------------------------|---|---|---|
| Dimensions (W × H × D) | 48.7 × 27.9 × 2.2 in (1237.3 × 709.8 × 56.4 mm) | 57.3 × 32.8 × 2.2 in (1456.4 × 833.7 × 57 mm) | 66.1 × 37.8 × 2.2 in (1679.7 × 959 × 56.8 mm) |
| Bezel width (T I B I L I R) | 0.5 0.5 0.5 0.5 in (12 12.8 12 12 mm) | 0.5 0.5 0.5 0.5 in (12.5 12.5 11.8 11.8 mm) | 0.5 0.5 0.5 0.5 in (13 13.5 13 13 mm) |
| Weight (product I shipping) | 32.4 lbs 42.1 lbs (14.7 kg 19.1 kg) | 45.6 lbs 63.3 lbs (20.7 kg 28.7 kg) | 63.9 lbs 89.3 lbs (29 kg 40.5 kg) |
| Mount (screws) | VESA 400 × 400 mm (4 × M6 × 12L) | VESA 400 × 400 mm (4 × M8 × 16L) | VESA 600 × 400 mm (4 × M8 × 16L) |
| VESA Hole (for media player) | 1 (75 × 75, 100 × 100) | 1 (75 × 75, 100 × 100) | 1 (75 × 75, 100 × 100) |
| Housing material | PC+ABS V0 | PC+ABS V0 | PC+ABS V0 |
| Handles | N/A | N/A | 2 |
| Shipping dimensions (W × H × D) | 54.6 × 33.3 × 5.1 in (1386 × 845 × 130 mm) | 65 × 6.4 × 40 in (1650 × 162 × 1016 mm) | 74.1 × 7.3 × 44.9 in (1883 × 186 × 1140 mm) |
| Environment | | | |
| Storage temperature | -14°F - 140°F -10°C - 60°C | 14°F - 140°F -10°C - 60°C | 14°F - 140°F -10°C - 60°C |
| Operating temperature | 32°F - 104°F 0°C - 40°C | 32°F - 104°F 0°C - 40°C | 32°F - 104°F 0°C - 40°C |
| Storage humidity | 10% - 80% RH non-condensing | 10% - 80% RH non-condensing | 10% - 80% RH non-condensing |
| Operating humidity | 10% - 80% RH non-condensing | 10% - 80% RH non-condensing | 10% - 80% RH non-condensing |
| Software | | | |
| Device management | DMS | DMS | DMS |
| Content management | X-Sign | X-Sign | X-Sign |
| Wireless screen sharing | InstaShare 2 | InstaShare 2 | InstaShare 2 |
| Account management | AMS | AMS | AMS |
| UI resolution | 4K UHD | 4K UHD | 4K UHD |

| Accessories | | | |
|--------------------------|--|--|--|
| RS-232 cable | 1 (5.9 ft 1.8 m) | 1 (5.9 ft 1.8 m) | 1 (5.9 ft 1.8 m) |
| Quick start guide | In box | In box | In box |
| Remote control | 1 | 1 | 1 |
| User manual | Online | Online | Online |
| Вох | BenQ designed | BenQ designed | BenQ designed |
| Cables | 1 × HDMI (4.9 ft 1.5 m), 1 × RS-232 (5.9 ft 1.8 m) | 1 × HDMI (4.9 ft 1.5 m), 1 × RS-232 (5.9 ft 1.8 m) | 1 × HDMI (4.9 ft 1.5 m), 1 × RS-232 (5.9 ft 1.8 m) |
| On-screen menu languages | | 28L (AR, CS, DA, DE, EL, EN, ES-ES, FA, FI, FR, HE, HU, ID, IT, JA, KO, NB, NL, PL, PT-BR, RO, RU, SV, TH, TR, VI, ZH-CN, ZH-TW) | 28L (AR, CS, DA, DE, EL, EN, ES-ES, FA, FI, FR, HE, HU, ID, IT, JA, KO, NB, NL, PL, PT-BR, RO, RU, SV, TH, TR, VI, ZH-CN, ZH-TW) |
| OSD | | | |
| On-screen menu | BenQ customized | BenQ customized | BenQ customized |
| Feature | | | |
| Sharpness enhancement | Yes | Yes | Yes |
| CEC control | Yes | Yes | Yes |

Yes

Yes

Matte

1

USB, OTA

Yes

Yes

Matte

1

USB, OTA

Real-time clock

Firmware updates

Freeze and blank screen

Temperature sensor

Screen finish

Yes

Yes

Matte

USB, OTA



Dealer's Stamp

© 2025 BenQ Corp. Specification may vary by region, please visit your local stores for details. Actual product's features and specifications are subject to change without notice. This material may include corporate names and trademarks of third parties which are the properties of the third parties respectively.

Doc.: PDP_SH5504/SH6504/SH7504_DSE_EN_202503